


TECHNICAL DRAWING



PHOTO

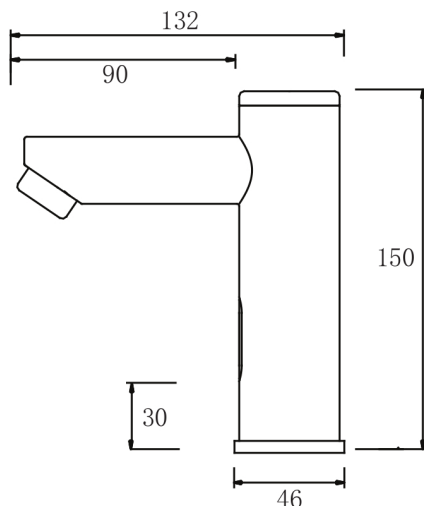

PRODUCT FAMILY: ELECTRONIC TAP HYBRID LINE

CODE: RUELDA01

DESCRIPTION:

Electronic single water tap.

HYDRAULIC PERFORMANCES:

Tap with mixer

APPROVALS/CERTIFICATIONS:

TUV system certification UNI EN ISO 9001

Compliant with:

REGULATION (EU) N ° 35/2014 "LOW VOLTAGE DIRECTIVE"

REGULATION (EU) N ° 30/2014 "ELECTROMAGNETIC COMPATIBILITY DIRECTIVE"

PRODUCT FEATURES:

Electronic tap operated by photocell. Suitable for domestic use and for public spaces or areas for disabled people. Electronic faucets allow

considerable water savings and a higher hygienic level if compared to traditional and self-closing taps.

Powered by battery box for 4 stylus battery, or with transformer, both include (batteries not included).

The sensors are designed to avoid faucets to be left open (anti-waste and anti-flood function) and to have a maximum 50 seconds operation time; if

the sensor is covered for more than 50 seconds the water stops automatically. To recover the proper operation, remove any obstacle.

TECHNICAL DATA:

Product operation system: Infrared technology

Installation: washbasin mounted

Max. inlet hot water temperature: 70°C

Working pressure: from 0.5 to 6 bar. In case of pressures higher than 6 bar, use a pressure reducer

Power supply specifics: System of electrical supply: Battery 6 V or transformer 6 V

Max. delivery time (anti-vandal safety time tempo): 60 seconds

Activation delay: 0,5 sec

Factory set actining distance: 120 - 180 mm

Battery life: 110,000 cycles (about)

Electrical connection battery box/transformer: use the supply chain provided.

Solenoid valve electrical connection: use the device provided

Solenoid valve hydraulic connection ½" G M

Water inlet connection: ½" G female

Base: Ø 55 mm

The above mentioned information cannot be considered as binding. Thermomat Saniline Srl reserves the right to make technical and aesthetic changes without any prior notice.

| | |
|---------------------------|-------------------|
| ST_PRODOTTO: RUELDA01 - 1 | APPROVATO R.T. |
| REV.00 DEL 20/12/19 | |

THERMOMAT SANILINE SRL

Via M. Curie, 7 - 46034 Borgo Virgilio (Mantova) ITALY

Tel. + 39 0376 4473

www.thermomat.com - e-mail: info@thermomat.com



| | |
|---|--|
| <p>FIXING/INSTALLATION:</p> | <p>MAINTENANCE: Maintenance of the special and chrome-plated finishings. DO NOT use steel wool or cleaning agents products that contain alcohol, acids, abrasives or similar. The use of any of the prohibited products for cleaning or maintenance could damage the surface of the faucet. To clean the surface ONLY use soap or detergent and water, then dry with a soft cotton cloth. Taps should be protected from sprays of aggressive agents while cleaning the tiles.</p> |
| <p>PRODUCT COMPOSITION: N° 1 Tap - Chrome-plated brass N° 1 Battery Box / transformer N° - Fixing elements - various materials N° 1 Solenoid valve</p> | <p>TOLERANCES:</p> <p>PACKAGING OF THE PRODUCT: Packed in cardboard box 310 x 225 x 60 mm. Weight 1,5 kg</p> |

The above mentioned information cannot be considered as binding. Thermomat Saniline Srl reserves the right to make technical and aesthetic changes without any prior notice.

| | |
|---------------------------|-------------------|
| ST_PRODOTTO: RUELDA01 - 1 | APPROVATO R.T. |
| REV.00 DEL 20/12/19 | |

THERMOMAT SANILINE SRL
 Via M. Curie, 7 - 46034 Borgo Virgilio (Mantova) ITALY
 Tel. + 39 0376 4473
 www.thermomat.com - e-mail: info@thermomat.com

