


PRODUCT TECHNICAL SHEET

TECHNICAL DRAWING



PHOTO

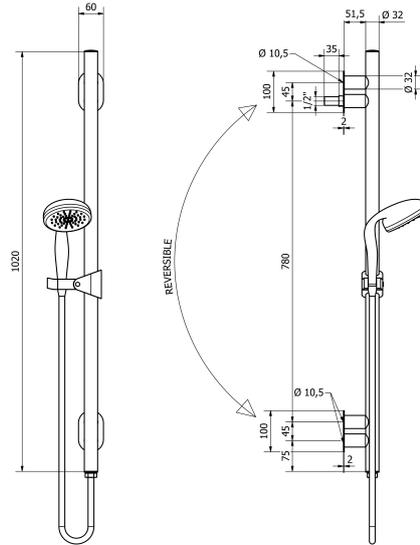

PRODUCT FAMILY: SHOWER COLUMN - ELEGANCE SERIES
CODE: ELSHDOCC
DESCRIPTION: Safety shower column with hand shower - chrome finishes

MECHANICAL PERFORMANCES:
 Load capacity at vertical traction 200 kg. Maximum flow rate at 3 bar: 10 l/min Connection for water on both sides (upper and lower)

APPROVALS/CERTIFICATIONS:
 TUV system certification UNI EN ISO 9001

PRODUCT FEATURES:

Safety shower column mat white finish with: hand shower in ABS chromed (3 jets), flexible chromed. The product is made of a column diameter 32 mm made of painted stainless steel AISI 304, able to resist to a traction resistance of 200 kg. Inside the column there is a system of tubes and connections in order to conduct the water to the hand shower, in order to allow the use of water inlet 1 / 2 " G pre-existing into the wall. Plates in order to cover the water inlet point are included. Taps not included in the product.

FIXING/INSTALLATION:

Wall mounted with 2/3 fasteners. Connect the water connection to the wall water intake.
 Fasteners not included in the package.
 Choose a proper screw / fastener considering the type of wall.
 Dimension of holes for fixation screw: Ø 10,5 mm.
 Connection for water intake 1/2" G

MAINTENANCE:

PRODUCT COMPOSITION:

N° 1 Shower column made of stainless steel aisi 304 - Aluminium - Painted Brass
 N° 1 Hand shower made of chromed ABS
 N° 1 Flexible and components like tube and connections

MATERIALS:

TREATEMENTS:

TOLERANCES:

PACKAGING OF THE PRODUCT:

Single package in carton box with pluriball protection mm
 Weight: 2,5 kg

The above mentioned information cannot be considered as binding. Thermomat Saniline Srl reserves the right to make technical and aesthetic changes without any prior notice.

ST_PRODOTTO: ELSHDOCC - 1	APPROVATO R.T.
REV.00 DEL 24/01/2020	

THERMOMAT SANILINE SRL

Via M. Curie, 7 - 46034 Borgo Virgilio (Mantova) ITALY

Tel. + 39 0376 4473

www.thermomat.com - e-mail: info@thermomat.com

