

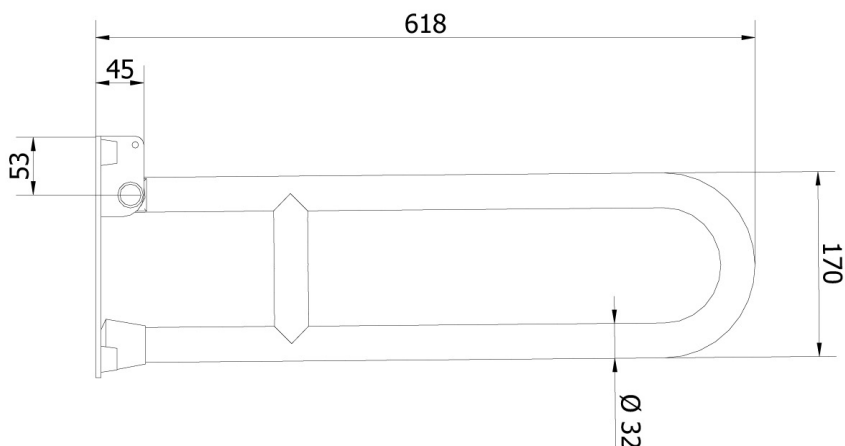


TECHNICAL DRAWING

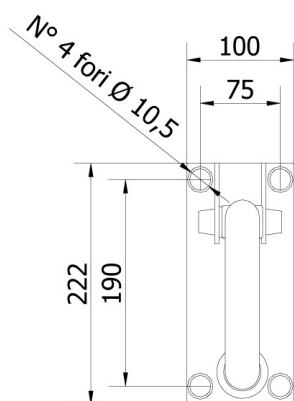

PHOTO

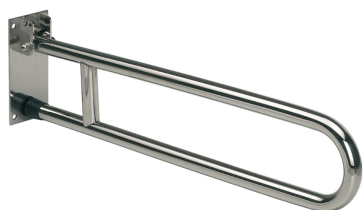

**PRODUCT FAMILY:** HANDBARS AND HANDRAILS – INOX SERIES

**CODE:** 600-NX

**DESCRIPTION:** Hinged folding support rail, 600 mm, with blocking device in upright position. Polished stainless steel.

**MECHANICAL PERFORMANCES:**

Capacità di tenuta 150 kg.

**APPROVALS/CERTIFICATIONS:** TUV product certification.

TUV system certification UNI EN ISO 9001:2008.

Declaration of Conformity according to European Medical Device Directive 93/42.

Reference regulations: Pr EN 1874; UNI EN 12182; UNI CEI EN ISO 14971; UNI EN 1041.

**PRODUCT FEATURES:**

Ø 32 cold bent body, complete with mounting plate.

**FIXING/INSTALLATION:**

Wall mounting by n° 4 plugs.

Plugs are not included in the package.

Read the instruction sheet to choose the suitable plugs according to the type of wall.

**MAINTENANCE:**

Check the correct fastening of the accessories periodically.

Perform a proper cleaning with water and soap, do not use abrasive or corrosive agents or coarse sponges.

Do not use hydrochloric or sulphuric acid or any of their compounds, derivatives or solutions.

**PRODUCT COMPOSITION:**

N° 1 Pipe Ø32 x 15/10 - Stainless Steel AISI 304 - Polished

N° 1 Mounting plate - Stainless Steel AISI 304

N° 1 Rotation screw - Steel

N° 6 Nut covers - Nylon PA6 - RAL9005

N° 6 Washers for nut covers - Nylon PA6 - RAL9005

N° 6 Washers for nut covers - Nylon PA6 - RAL9005

N° 1 Mechanical locking device - Nylon PA6 - RAL9005

**TOLERANCES:**

GENERAL TOLERANCES - LENGTH (mm)

0÷300 ±3 301÷600 ±4 601÷2000 ±5

**PACKAGING OF THE PRODUCT:**

Individually wrapped in bubble wrap and packed in cardboard box 650 x 241 x 110 mm.

Weight: 4 kg

The above mentioned information cannot be considered as binding. Thermomat Saniline Srl reserves the right to make technical and aesthetic changes without any prior notice.

ST_PRODOTTO: 600-NX - 1	APPROVATO R.T.
REV.00 DEL 25/09/09	

**THERMOMAT SANILINE SRL**  
Via M. Curie, 7 - 46034 Borgo Virgilio (Mantova) ITALY  
Tel. + 39 0376 4473  
www.thermomat.com - e-mail: info@thermomat.com

