


PRODUCT TECHNICAL SHEET



PHOTO

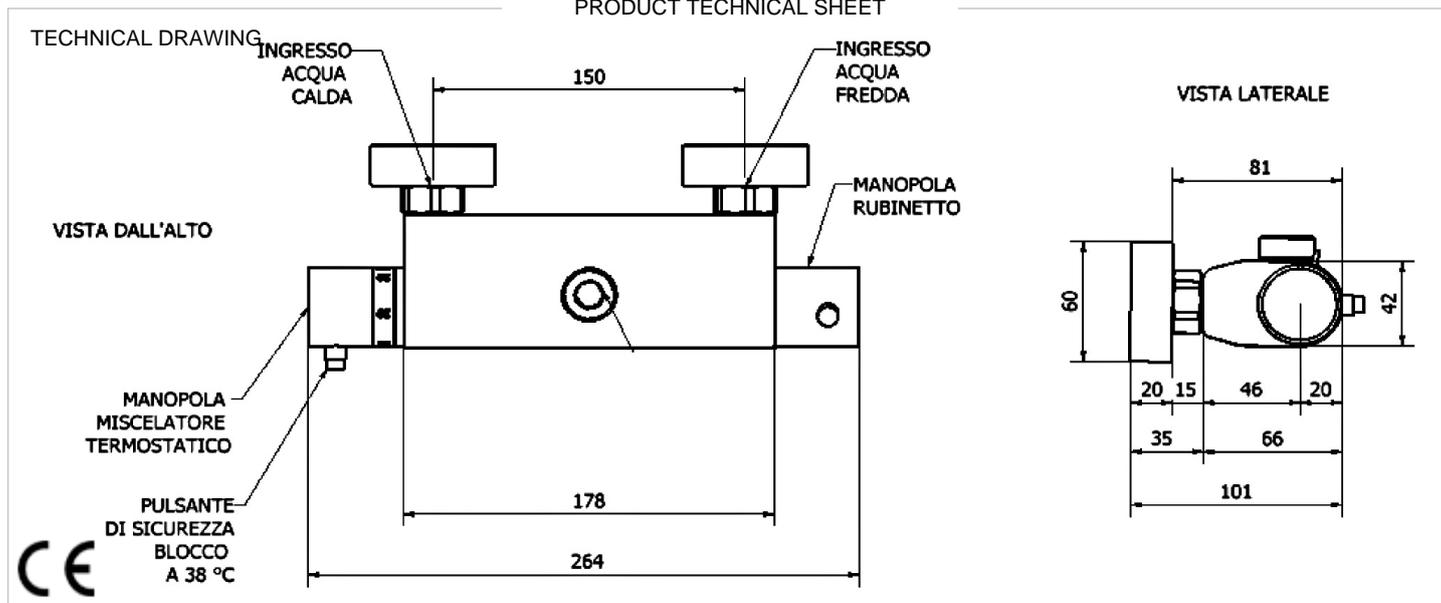

PRODUCT FAMILY: THERMOSTATIC MIXER - THERMOMIX LINE

CODE: RUMT201CFS34

DESCRIPTION:

External thermostatic mixer for shower with 3/4" upper outlet

HYDRAULIC PERFORMANCE:

Flow rate: over 24 l/min at 3 bar.

CERTIFICAZIONI:

TUV certification UNI EN ISO 9001:2008.

WRAS and ACS certified thermostatic cartridge.

PRODUCT FEATURES:

Cast brass body with interchangeable thermostatic cartridge. Equipped with check valves.

1/2" lower outlet for or 3/4" upper outlet for flexible or shower column, depending on the model: RUMT201CFI, RUMT201CFS, RUMT201CFS34.

GF 3/4" GF-1/2" GM eccentric and chromed rosette; wheelbase distance as per standard UNI EN 1111 to adapt to both new and existing installations.

Versions with minimal ABS chrome levers, in chrome-plated brass, with clinical lever, with longer levers: RUMT201CFI, RUMT201CFIML,

RUMT201LCFI, RUMT201CFIMLL.

The temperature of the mixer body does not exceed the temperature of the mixed water thus avoiding dangerous scalds.

FIXING/INSTALLATION:

3/4"GF or 1/2"GF inlets with eccentric

Distance from the rear part of the mixer from the wall approx. 35 mm. See the

instruction sheet for the correct installation

MAINTENANCE:

Periodically check the correct fixing of the product

You can clean the external body of the mixer with water and soap or other suitable

products; avoid chemical products, aggressive or abrasive. Dry with a soft cloth

In case of special maintenance (cleaning of the cartridge) refer to the complete

instruction sheet.

PRODUCT LISTING:

N° 1 External body, molded brass (Alloy CB75636) Polished and chromed

N° - O-ring NBR

N° - Cartridge components in brass UNI EN 12164 CW14

N° 2 Handle in Chromed ABS, brass or zamack (according to the model)

N° 2 Check valves

N° - Stainless steel spring AISI 302

N° 1 Thermosensitive wax element

TOLERANCES:

PACKAGING OF THE PRODUCT:

package in a cardboard box 80 x 85 x 290 mm.

Weight: 2 kg