



## PRODUCT TECHNICAL SHEET

### TECHNICAL DRAWING

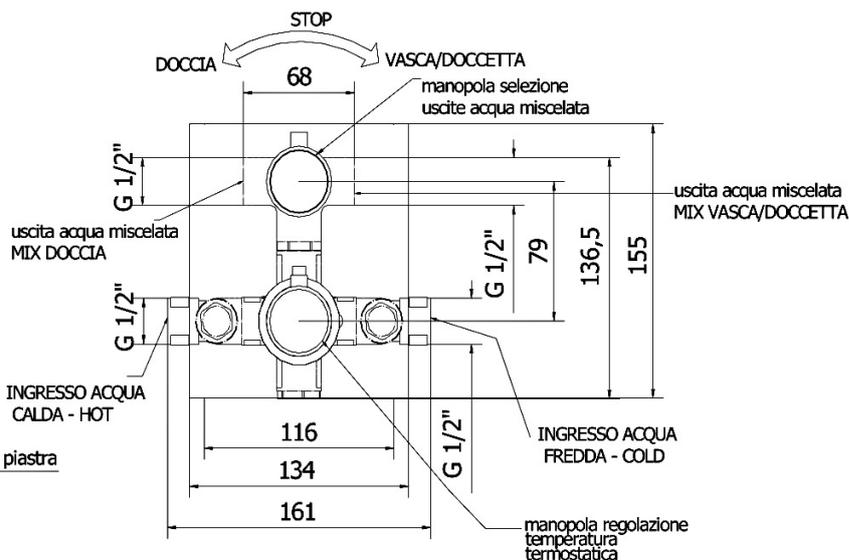

### PHOTO

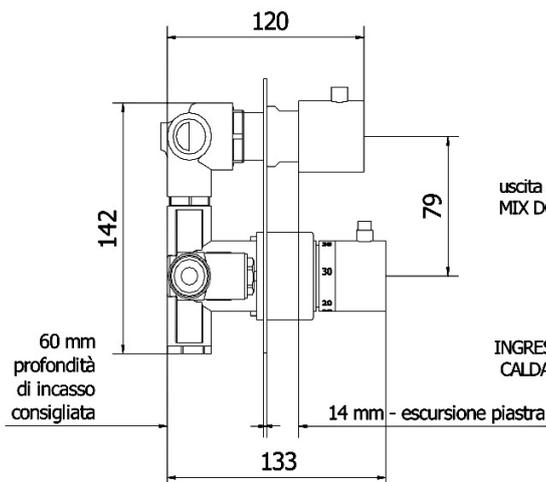

**PRODUCT FAMILY:** THERMOSTATIC FAUCETS - THERMOMIX LINE

**CODE:** TMT112D2ML

**DESCRIPTION:**

Concealed thermostatic mixer with 2 way diverter and stop valve.

**HYDRAULIC PERFORMANCES:**

With thermostatic mixer and 1/2" G connections.

Flow rate at free spout : 17,5 l/min (3 bar)

**CERTIFICATIONS:**

TUV certification UNI EN ISO 9001:2008.

WRAS and ACS certified thermostatic cartridge

### PRODUCT FEATURES:

Concealed thermostatic mixer with ceramic disc diverter; 2 outputs and a stop position, Minimal line.

Also available with a round plate.

Brass body, chrome plated brass fittings, knobs in chrome-plated ABS.

Temperature control knob with scale and lock button at 38°C. Interchangeable cartridge with filters and check valves on the inlets.

The thermostatic mixing valve adjusts to a predetermined value the water temperature automatically mixing the hot and cold water, regardless of variations in pressure and temperature of the incoming water.

Therefore it allows the maximum comfort, a considerable energy saving and avoids the danger of accidental scalding.

The filters and the check valves can be easily inspected.

Installation depth from 60 to 74 mm. A cover for wall-mounting is included.

### TECHNICAL DATA:

Connections: 1/2" G female

Maximum pressure (static): 1.000 KPa (10 Bar)

Working pressure (dynamic): 100÷500 KPa (1÷ 5 Bar)

Maximum inlet temperature: 85°C

Handle control range: 30÷50°C

Safety block: 38°C

Ceramic disc diverter with 2 outlets + stop

Flow rate on a single outlet, free spout: 17,5 l/min (3 bar)

Ceramic disc tap - 90° movement

Inspectable connections with check valves and filters

Cover for wall concealing

The above mentioned information cannot be considered as binding. Thermomat Saniline Srl reserves the right to make technical and aesthetic changes without any prior notice.

ST_PRODOTTO: TMT112D2ML - 1	APPROVATO R.T.
REV.00 DEL 01/04/10	

**THERMOMAT SANILINE SRL**  
Via M. Curie, 7 - 46034 Borgo Virgilio (Mantova) ITALY  
Tel. + 39 0376 4473  
www.thermomat.com - e-mail: info@thermomat.com



<p><b>FIXING/INSTALLATION:</b></p>	<p><b>MAINTENANCE:</b> DO NOT use steel wool or cleaning agents containing alcohol, chlorine, acids, abrasives or similar. The use of any of the prohibited products for cleaning or maintenance could damage the surface of the faucet. To clean the surface use ONLY soap and water, then dry with a clean cloth or towel. Do not use abrasive or rough sponges.</p>
<p><b>PRODUCT LISTING:</b> N° 1 Body in printed brass UNI EN 12165 CW617N N° - Shutter and internal parts in brass UNI EN 12164 CW614N N° - Stainless steel springs AISI 302 N° 1 O-ring NBR N° 2 Handles in chromed ABS N° 1 Plate in polished and chromed brass N° 1 Diverter in brass, ceramic discs</p>	<p><b>TOLERANCES:</b></p> <p><b>PACKAGING OF THE PRODUCT:</b> Packed in a cardboard box. Weight: 2,3 kg without packaging-</p>

The above mentioned information cannot be considered as binding. Thermomat Saniline Srl reserves the right to make technical and aesthetic changes without any prior notice.

ST_PRODOTTO: TMT12D2ML - 1	APPROVATO R.T.
REV.00 DEL 01/04/10	

**THERMOMAT SANILINE SRL**  
Via M. Curie, 7 - 46034 Borgo Virgilio (Mantova) ITALY  
Tel. + 39 0376 4473  
www.thermomat.com - e-mail: info@thermomat.com

