


PRODUCT TECHNICAL SHEET

TECHNICAL DRAWING



PHOTO

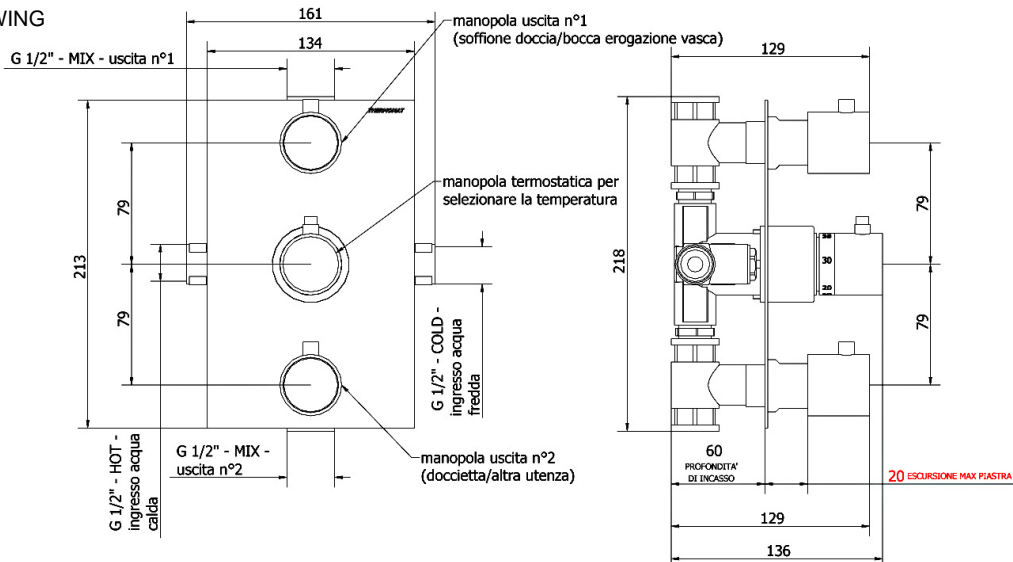

PRODUCT FAMILY: THERMOSTATIC MIXERS - THERMOMIXLINE

CODE: TMT12R12ML

DESCRIPTION:

Thermostatic mixer for wall concealing with 2 stop taps

HYDRAULIC PERFORMANCES:

With thermostatic mixer and 1/2"G connections

Free spout flow rate: 23,0 l/min (3 bar)

CERTIFICATIONS:

TUV certification UNI EN ISO 9001:2008.

WRAS and ACS certified thermostatic cartridge.

PRODUCT FEATURES:

Thermostatic mixer for wall concealing with 2 stop taps. Brass body, chrome plated finishes, knobs in chromed ABS. Temperature regulating handle with scale and safety block at 38°C. Interchangeable cartridge, with filters and check valves on the inlets. The thermostatic mixer regulates at a prefixed value the temperature of the water automatically mixing hot water and cold water, regardless of the pressure changes and of the inlet water temperature. It allows therefore the maximum comfort, a relevant saving in energy and it avoids the danger of accidental scalding. Ceramic disc tap with traditional headworks. The filters and the check valves can be easily inspected. Wall depth installation from 60 to 80 mm.

TECHNICAL DATA:

Connections: 1/2" G female

Maximum pressure (static): 1.000 KPa (10 Bar)

Working pressure (dynamic): 100÷500 KPa (1÷5 Bar)

Maximum inlet temperature: 85°C

Campo di regolazione manopola Control handle range: 30÷50°C

Safety block: 38°C

Free spout flow rate: 23,0 l/min (3 bar)

N° 2 taps 1/2" with traditional headworks

Inspectable connections with check valves and filters.

The above mentioned information cannot be considered as binding. Thermomat Saniline Srl reserves the right to make technical and aesthetic changes without any prior notice.

ST_PRODOTTO: TMT12R12ML - 1

APPROVATO

R.T.

REV.00 DEL 01/04/10

THERMOMAT SANILINE SRL

Via M. Curie, 7 - 46034 Borgo Virgilio (Mantova) ITALY

Tel. + 39 0376 4473

www.thermomat.com - e-mail: info@thermomat.com



<p>FIXING/INSTALLATION:</p>	<p>MAINTENANCE: DO NOT use steel wool or cleaning agents containing alcohol, chlorine, acids, abrasives or similar. The use of any of the prohibited products for cleaning or maintenance could damage the surface of the faucet. To clean the surface use ONLY soap and water, then dry with a clean cloth or towel. Do not use abrasive or rough sponges.</p>
<p>PRODUCT LISTING: N° 1 Printed brass body UNI EN 12165 CW617N N° - Shutter and internal parts in brass UNI EN 12164 CW614N N° - Stainless steel springs AISI 302 N° 1 O-ring NBR N° 3 Handles in chromed ABS N° 1 Plate in polished and chromed brass N° 1 Brass faucet and ceramic discs</p>	<p>TOLERANCES:</p> <p>PACKAGING OF THE PRODUCT: Package in a cardboard box Weight: 3 kg without packaging</p>

The above mentioned information cannot be considered as binding. Thermomat Saniline Srl reserves the right to make technical and aesthetic changes without any prior notice.

<p>ST_PRODOTTO: TMTI2R12ML - 1</p>	<p>APPROVATO R.T.</p>
<p>REV.00 DEL 01/04/10</p>	

THERMOMAT SANILINE SRL
 Via M. Curie, 7 - 46034 Borgo Virgilio (Mantova) ITALY
 Tel. + 39 0376 4473
 www.thermomat.com - e-mail: info@thermomat.com

