


PRODUCT TECHNICAL SHEET

TECHNICAL DRAWING



PHOTO

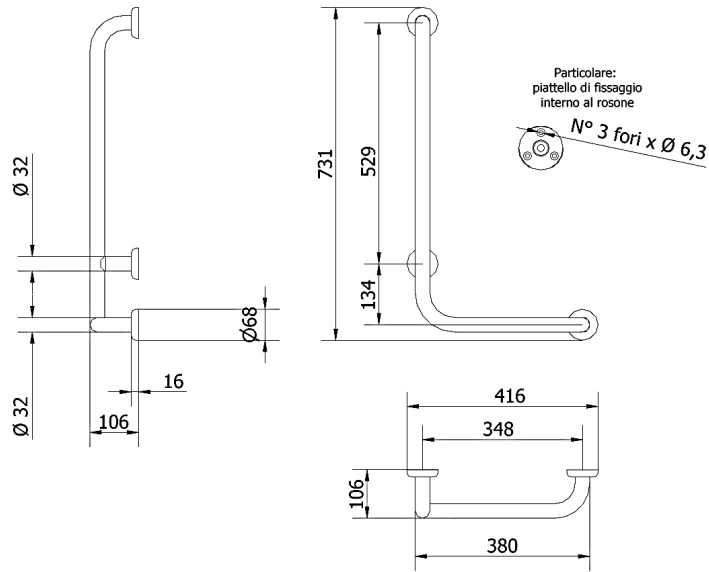

PRODUCT FAMILY: HANDBARS AND HANDRAILS – PAINTED SERIES

CODE: MAS-I

DESCRIPTION: L-shape handbar 2000 mm drawn left hand with central spacer.

Electrical insulation. White colour.

MECHANICAL PERFORMANCES:

Maximum load 150 kg.

APPROVALS/CERTIFICATIONS:

TUV system certification UNI EN ISO 9001

EC declaration of conformity to the European Regulation for Medical Devices 745/2017.

Reference standards: UNI EN 12182

PRODUCT FEATURES:

$\varnothing 32$ cold bent body, featuring a supplementary central fixing spacer and complete with mounting flanges and flange covers.

The mounting flanges electrically insulate the product.

It is not possible to apply the hanging seat mod. SDA.

FIXING/INSTALLATION:

Wall mounting by 9 plugs.

Plugs are not included in the package.

Read the instruction sheet to choose the suitable plugs according to the type of wall.

wall.

PRODUCT COMPOSITION:

N° 2 Pipes $\varnothing 32 \times 15/10$ Fe P04 Zinc-coated and painted RAL9016

N° 3 Mounting flanges Nylon PA6 RAL9016

N° 3 FLange covers Nylon PA6 RAL9016

N° 3 Flange fixing screws Steel Tropicalized

N° 2 Fixing bushings Brass UNI EN 12164 CW614N

N° 1 Support Nylon PA6 RAL9016

MAINTENANCE:

Check the correct fastening of the accessories periodically.

Perform a proper cleaning with water and soap, do not use abrasive or corrosive agents or coarse sponges.

TOLERANCES:

GENERAL TOLERANCES - LENGTH (mm)

0÷300 ± 3 301÷600 ± 4 601÷2000 ± 5

PACKAGING OF THE PRODUCT:

Individually wrapped in bubblewrap and packed in cardboard box 390 x 105 x 720

mm.

Weight: 2,2 kg

The above mentioned information cannot be considered as binding. Thermomat Saniline S.r.l. reserves the right to make technical and aesthetic changes without any prior notice.

ST_PRODOTTO: MAS-I	APPROVATO R.T.
REV.03 del 10/02/2022	

Thermomat Saniline s.r.l.

ISO 9001 Quality Management System certified by TÜV Italia Srl since 2005

Via M. Curie, 7 - 46034 Borgo Virgilio (Mantova) ITALY

Tel. + 39 0376 4473

www.thermomat.com - info@thermomat.com