

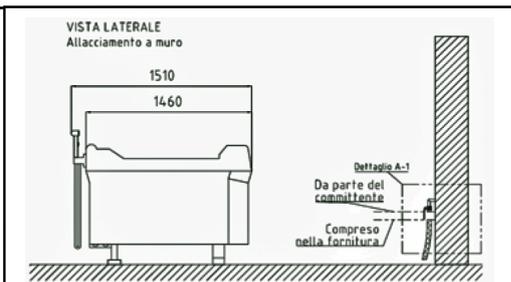


TECHNICAL DRAWING

Larghezza	760 mm
Altezza totale	970 mm
Altezza della vasca	690 mm
Lunghezza	1510 mm
Larghezza porta laterale	780 mm
Altezza seduta	520 mm
Altezza entrata	210 mm
Peso vasca piena	400 kg
Capacità	160 lt

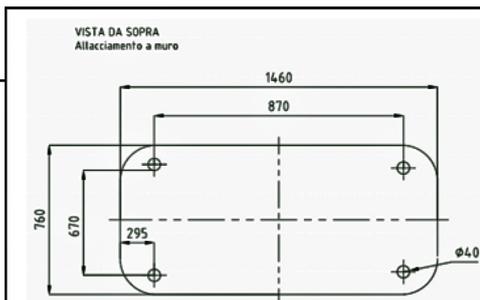

Allacciamenti

- 1=Acqua calda 3/4"
- 2=Acqua fredda 3/4"
- 3=Allacciamento elettrico 230V /50 Hz
- 4= Scarico DN50
- 5=Messa a terra



PHOTO



PRODUCT FAMILY: BATHTUBS

CODE: VS001

DESCRIPTION: Bath seat with side door opening to the outside, thermostatic mixing valve, electronic controls.

MECHANICAL PERFORMANCES:

APPROVALS/CERTIFICATIONS:

TUV certification UNI EN ISO 9001:2008.
 CE declaration of conformity according to the European Directive for Medical Devices 93/42.
 Reference standards: Pr EN 1874 UNI EN 12182 and UNI CEI EN ISO 14971, EN 1041.

PRODUCT FEATURES :

Seat bathtub in polyester reinforced with fiberglass and gelcoat hygienic coating in Gelcoat. Opening door on the outward, up to 180° to facilitate the transfer even from a wheelchair. Door lock with electronic locking by an electric motor; a safety system allows the door to open at any time in case of an emergency. In case of power failure, the security system is powered by a built-in backup battery. Chassis of the bathtub with anatomically shaped backrest, raised headrest and a groove on the seat for the flow of water. Bathtub filling operated by buttons on the incorporated control panel. Control of the electronic functions by keypad on the control panel with control of the activated function. Signal of the error codes on the display. Adjustable temperature with thermostatic mixer 3/4" with digital indication of the temperature of the water. Shower operated by control panel, with self-locking valve and white pipe attachable to the border of the bathtub. Base with adjustable feet, galvanized and coated with white polyester powder coating, scratch and impact resistant.

TECHNICAL DATA:

Width 760 mm
 Total height 970 mm
 Height of the bathtub 690 mm
 Length 1510 mm
 Side door width 780 mm
 Seat height 520 mm

Entrance height 210 mm

Tub full weight 400 kg

Capacity 160 liters

ST_PRODOTTO: VS001	- 1	APPROVATO
		R.T.
REV.001 DEL 15/09/11		

THERMOMAT SANILINE SRL

Via M. Curie, 7 - 46034 Borgo Virgilio (Mantova) ITALY

Tel. + 39 0376 4473

www.thermomat.com - e-mail: info@thermomat.com



<p>FIXING/INSTALLATION: Place the tub in the room. Connect the hot and cold water inlets. Connect drain. Connect the power supply. Make sure there are no leaks in connections. connections 1 = Hot Water ¾ " 2 = Cold water ¾ " 3 = Electrical connection 230V / 50 Hz 4 = Drain DN50 5 = Ground</p>	<p>MAINTENANCE: Check for proper attachment of the connections.</p> <p>Make a proper cleansing with soap and water, disinfectant, do not use abrasive cleaners, bleaches (methylene blue, iodine, potassium permanganate), aggressive chemicals (chlorine, solvents), corrosive.</p>
<p>PRODUCT LISTING: N° 1 Walk-in bathtub</p>	<p>TOLERANCES:</p> <p>PACKAGING: Packed in cardboard box on a pallet</p>

ST_PRODOTTO: VS001 - 1	APPROVATO R.T.
REV.001 DEL 15/09/11	

