


PRODUCT TECHNICAL SHEET

TECHNICAL DRAWING



PHOTO

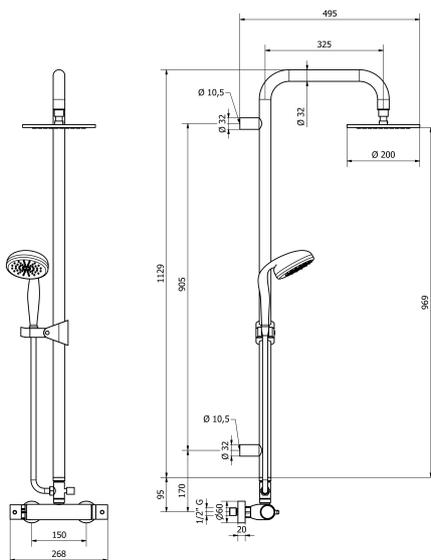

PRODUCT FAMILY: SHOWER COLUMN - ELEGANCE SERIES
CODE: ELSHTCSDC
DESCRIPTION: Safety shower column with thermostatic mixer, diverter, showerhead, hand shower. Chromed finishes

MECHANICAL PERFORMANCES:
 Load capacity ad vertical traction 200 kg. Maximum flow rate 3 bar: 10 l/min

APPROVALS/CERTIFICATIONS:
 TUV system certification UNI EN ISO 9001

PRODUCT FEATURES:

Safety shower column chromed finish with: thermostatic mixer "cold body" complete with pull diverter in chrome-plated brass, showerhead in chrome-plated brass (adjustable), hand shower in ABS chromed finishes (3jets) and flexible chromed finishes. The product is made of a column diameter 32 made of polished stainless steel AISI 304, able to resist to a traction resistance of 200 kg. Inside the column there is a system of tubes and connections in order to conduct the water to the head shower. The thermostatic mixer is produced by Thermomat and it is a "cold body" type, it assures a high level of comfort, and limits the surface temperature of the tap in order to avoid burns.

FIXING/INSTALLATION:

Fixation of the column to the wall with n° 2 fasteners.
 Fasteners not included in the package
 Choose the correct type of fastener considering the type of wall on which you are going to install the column.
 Dimension of the holes for the screws used for wall fixation: \varnothing 10,5 mm.
 Fixation of the thermostatic device with standard connections

MAINTENANCE:

Check periodically the correct fixation of the accessories.
 Make a proper cleaning with water and soap.
 Do not use abrasive or corrosive products.
 Do not use for different purposes.
 Clean regularly the thermostatic cartridge.

PRODUCT COMPOSITION:

MATERIALS:

TREATEMENTS:

N° 1 Shower column made of stainless steel AISI 304 - aluminium - chromed
 N° 1 Thermostatic mixer made of chromed brass
 N° 1 Diverter made of chromed brass
 N° Head shower made of brass chromed
 N° 1 Hand shower made of ABS chromed
 N° 1 Flexible and components: tube and connections

TOLERANCES:

PACKAGING OF THE PRODUCT:

Package with pluriball in single carton box mm 380x1090x100 mm.
 Weight: 7 kg

The above mentioned information cannot be considered as binding. Thermomat Saniline Srl reserves the right to make technical and aesthetic changes without any prior notice.

ST_PRODOTTO: ELSHTCSDC - 1	APPROVATO R.T.
REV.00 DEL 24/01/2020	

THERMOMAT SANILINE SRL
 Via M. Curie, 7 - 46034 Borgo Virgilio (Mantova) ITALY
 Tel. + 39 0376 4473
 www.thermomat.com - e-mail: info@thermomat.com

