


TECHNICAL DRAWING



PHOTO

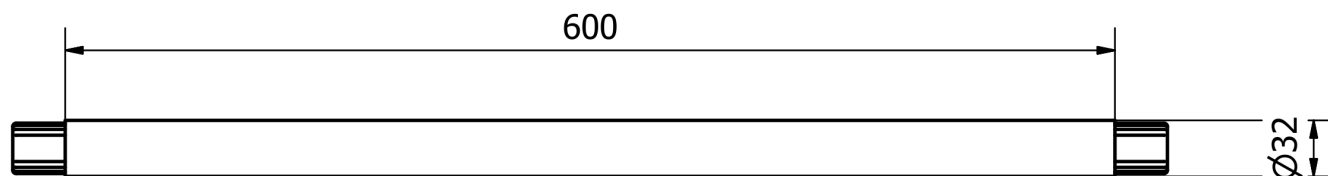

PRODUCT FAMILY: HANDABARS AND HANDRAILS – PAINTED SERIES
CODE: M30-I
DESCRIPTION: Linear handbar 300 mm. Electrical insulation. White colour.

MECHANICAL PERFORMANCES:
 Maximum load 150 kg.

APPROVALS/CERTIFICATIONS:
 TUV system certification UNI EN ISO 9001:2008.
 Declaration of Conformity according to European Medical Device Directive 93/42.
 Reference regulations: Pr EN 1874; UNI EN 12182; UNI CEI EN ISO 14971; UNI EN 1041.

PRODUCT FEATURES:

Ø 32 cold bent body, complete with mounting flanges and flange covers.
 The mounting flanges electrically insulate the product.
 It is not possible to apply the hanging seat mod. SDA.

FIXING/INSTALLATION:

Wall mounting by 6 plugs.
 Plugs are not included in the package.
 Read the instruction sheet to choose the suitable plugs according to the type of wall.

PRODUCT COMPOSITION:

N° 1 Pipe Ø32 x 15/10 Fe P04 Zinc-coated and painted RAL9016
 N° 2 Mounting flanges Nylon PA6 RAL9016
 N° 2 FLange covers Nylon PA6 RAL9016
 N° 2 Flange fixing screws Steel. Tropicalized
 N° 2 Fixing bushings Brass UNI EN 12164 CW614N

MAINTENANCE:

Check the correct fastening of the accessories periodically.
 Perform a proper cleaning with water and soap, do not use abrasive or corrosive agents or coarse sponges.

TOLERANCES:

GENERAL TOLERANCES - LENGTH (mm)
 0÷300 ±3 301÷600 ±4 601÷2000 ±5

PACKAGING OF THE PRODUCT:

Individually wrapped in bubblewrap and packed in cardboard box 110 x 40 x 340 mm.
 Weight: 0,6 kg

ST_PRODOTTO: CC600	- 1	APPROVATO R.T.
REV.00 DEL 30/04/2020		

THERMOMAT SANILINE SRL

Via M. Curie, 7 - 46034 Borgo Virgilio (Mantova) ITALY
 Tel. + 39 0376 4473
 www.thermomat.com - e-mail: info@thermomat.com

