


### TECHNICAL DRAWING



420 - MB		
A pavimento	SI	
Sospeso	NO	
Monoblocco	SI	
Scarico	Unificato	
Ingombri (Lunghezza x Larghezza) (mmxmm)	750 X 380	
Altezza (mm)	470	
Apertura frontale	SI	
Ø carico (mm)	---	
altezza carico (mm)	---	
Ø scarico (mm)	100	
altezza scarico	Unificato	
Carico cassetta	Dall'alto	
Funzione bidet	Disponibile nel modello 423 - MB	Posteriore centrale
Interasse fori fissaggio sedile	164	
Sedile	Art. 440-MB Art. 445-MB	Con apertura frontale e coperchio Con apertura frontale, senza coperchio
N° fissaggi a pavimento	4	

Attenzione!: per avere la cassetta appoggiata al muro in installazioni con scarico a pavimento mantenere la distanza del centro scarico a 170 mm. Posizionando lo scarico ad una distanza superiore a 170 mm e fino a 220 mm si avrà un'installazione conforme alla normativa nazionale, ma la cassetta risulterà distante dal muro.

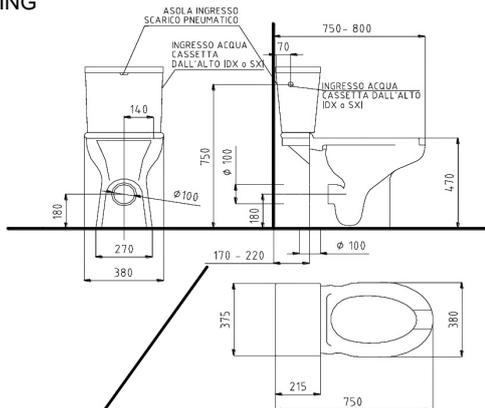

### PHOTO



### PRODUCT FAMILY: SANITARYWARE

CODE: 420-MB

DESCRIPTION: Close coupled floor mounted open front toilet, complete with cistern.

### PERFORMANCES:

It complies with regulation EN 997. Flush volume 6 lt.

### CERTIFICATIONS:

TUV system certification UNI EN ISO 9001:2008.

Declaration of Conformity according to European Council Directive 89/106/CEE for construction

products as regards sanitary appliances.

Reference regulations: EN 997:2003.

### PRODUCT FEATURES:

Ergonomic toilet. Height: 50 cm from the floor level. Suitable for wall or floor drain.

Vertical flush water supply; water can be supplied from both the right- and left-hand side. The two supply holes are covered with plastic caps, just

remove one cap and install the float valve.

Battery and float valve are not included.

The item comes with the flush button hole covered by a chrome-plated cap.

It is possible to use both mechanical or pneumatic batteries. Vertical fixing.

### FIXING (INSTALLATION):

N° 4 fixing elements for Ø8 mm screws.

Elbow joint for floor mount sold separately (420-MBC).

To ease the use by disabled people or with reduced motor skills, set the front edge at

75-80 cm from the back wall, then follow the instructions provided for by the relevant

regulations.

### PRODUCT COMPOSITION:

N° 1 toilet - Vitreous China - Enameled

N° 1 Toilet cistern - Vitreous China - Enameled

Accessories not included:

Toilet seat artt. 440-MB, 445-MB - Wood, Polyester

Brackets - Brass - Chrome-plated

### MAINTENANCE:

Check the correct fastening of the toilet periodically.

Clean with water and soap or other suitable products, do not use abrasive or corrosive agents. Dry with a soft cloth.

### TOLERANCE:

GENERAL TOLERANCES

±5% on all dimensions

### PRODUCT PACKAGING:

Packed in cardboard box 760 x 385 x 485 mm. Packed on pallet in case of purchase of multiple units.

Weight: 45 kg (toilet 30,5 kg, cistern 15 kg)

The above mentioned information cannot be considered as binding.

reserves the right to make technical and aesthetic changes without any prior notice.

ST\_PRODOTTO: 420-MB

APPROVATO  
1  
R.T.

REV.04 DEL 20/12/19

Via M. Curie, 7 - 46034 Borgo Virgilio (Mantova) ITALY

Tel. + 39 0376 4473

www.thermomat.com - e-mail: info@thermomat.com

